



geometric PENDANT

CB2

This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.


IMPORTANT SAFETY INSTRUCTIONS:
If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this lamp be performed by a licensed electrician.

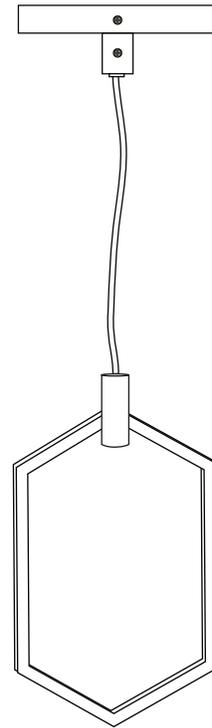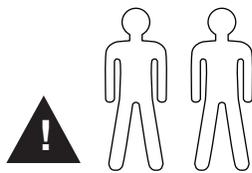

hardware & components

 800.606.6387

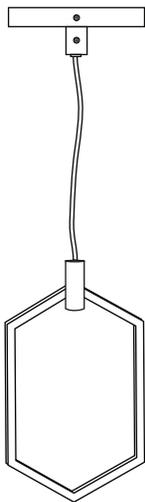

1 - lamp assembly



1 - mounting plate



2 - canopy bolts




2 - mounting bolts




1 - 13 watt max CFL dimmable bulb (NOT INCLUDED)
OR
1 - 60 watt max type A standard bulb (NOT INCLUDED)

tools required



flat head screwdriver




phillips head screwdriver

cleaning & care

Dust surfaces with a dry soft cloth. Do not use cleaners or polishes on the lamp.

geometric PENDANT

CB2

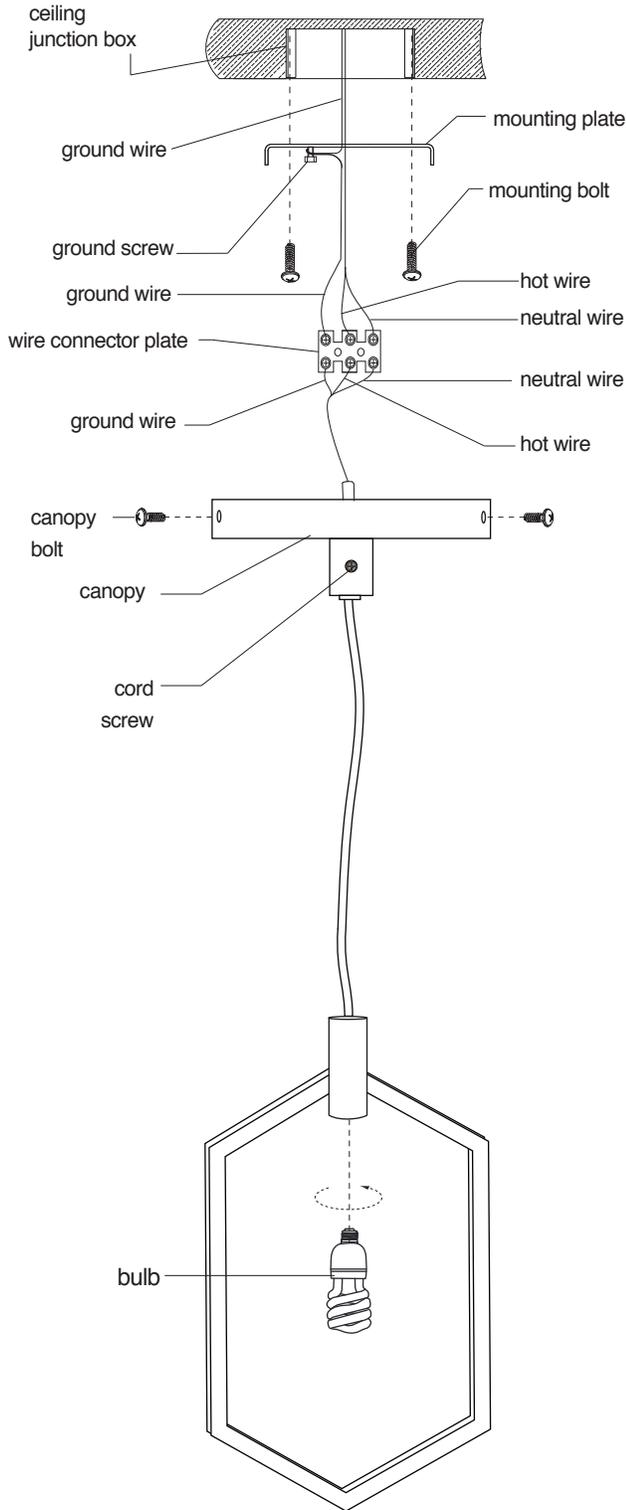

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Place the **mounting plate** over the center of the ceiling junction box.
- 4) Align holes in **mounting plate** with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
- 5) Using a **phillips head screwdriver**, loosen pre-installed *cord screw* on canopy and adjust the cord to desired length. Re-tighten cord screw to secure into position.
- 6) Gently pull wiring down from ceiling junction box and allow it to hang.
- 7) Carefully inspect the pendant's fixture wires:
 - *Neutral fixture wire* = white
 - *Hot fixture wire* = black
 - *Ground wire* = green
- 8) Loosen ground screw on mounting plate. Wrap *ground wire* from junction box and ground wire from the wire connector plate/fixture around screw. Re-tighten the ground screw.
- 9) Loosen the screws on the **wire connector plate**. Wrap the *neutral junction box wire* (usually white) around the screw on the wire connector plate and re-tighten.
- 10) Wrap the *hot junction box wire* (usually black) around the screw on the wire connector plate and re-tighten. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck wire connections neatly into the ceiling junction box.
- 12) Fit **canopy assembly** onto **mounting plate** and secure with 2 **canopy bolts**, using a **phillips head screwdriver**.
- 13) Insert 1- **bulb (not included)** into socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
- 14) Restore power to junction box and test fixture.

Installation is now complete.