


Thank you for purchasing the **Beacon Floor Lamp**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.
 Note: 2 people are required to safely assemble this product.

components



1 - diffuser




3 - caps




1 - 150 watt max type A (standard) bulb (NOT INCLUDED)



3- flat washers



1 - lampshade 1 - top tube



1 - bottom tube 1 - base assembly


assembly

Carefully remove all components from box, and remove all plastic coverings. Place **base unit** upright onto clean, padded surface.


A. Assemble **bottom tube** to **base assembly** as shown. Turn *bottom tube* clockwise to secure.

B. Assemble **top tube** to **bottom tube** as shown. Turn *top tube* clockwise to secure.


C. With assistance of another adult, assemble **lampshade** to *tube assembly* as shown. Turn top half of *tube assembly* counter-clockwise to secure.

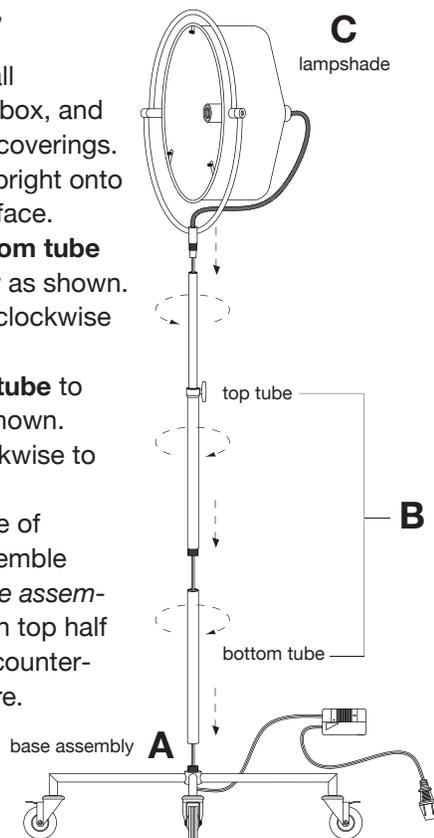


1



A. Tilt **lampshade** back as shown. Insert 1 - **bulb** (not included) in socket as shown.
 B. Fit threaded studs of **lampshade** into corresponding holes of **diffuser** as shown.
 C. Secure **diffuser** with 3 **caps** and 3 **flat washers** as shown. Turn each cap clockwise to fasten, but do not over tighten.



2

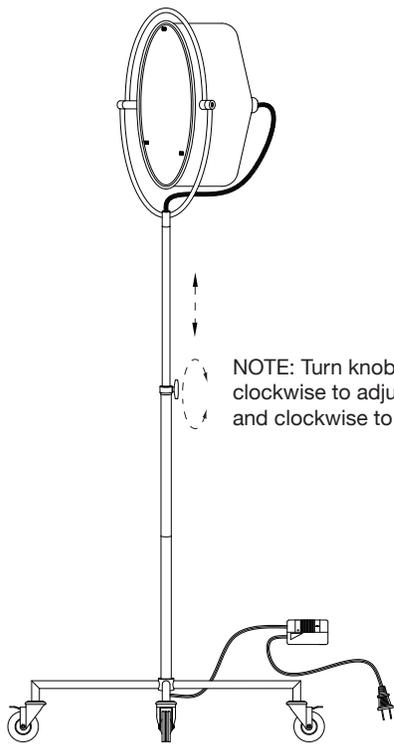

NOTE: Turn knob counter-clockwise to adjust height and clockwise to secure

3

Position **lampshade** upright as shown. Assembly is now complete.


cleaning & care

Do not use polishes or cleaners on your lamp. Dust surfaces with a dry soft cloth.

IMPORTANT SAFETY INSTRUCTIONS:


This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to override this safety feature.

changing the bulb

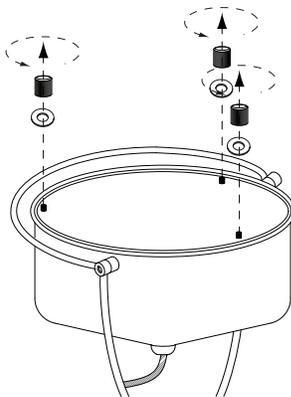


A

A. Remove caps and flat washers from diffuser as shown. Turn caps counter-clockwise to loosen.



B

B. Carefully remove diffuser from threaded studs as shown.



C

C. Remove lightbulb. Turn lightbulb counter-clockwise to remove. Install new bulb and replace diffuser.

4