


Thank you for purchasing the **Firefly Pendant**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

Note: 2 people are required to safely assemble this product.


tools required



phillips head screwdriver




electrical tape



flat head screwdriver

Note: We recommend the use of hand tools instead of power tools.

components

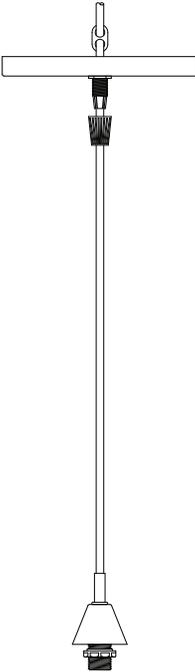


1 - canopy assembly (with 5 lamp assemblies)



5 - socket rings



1 - 25 watt max, type G (standard) NOT INCLUDED




2 - mounting bolts



1 - mounting plate (ground screw pre-attached)



2 - canopy bolts



5 - lampshades



3 - wire nuts

Missing hardware? Please call **800.606.6387** for replacements.


cleaning & care

Do not use polishes or cleaners on your lamp. Dust surfaces with a dry soft cloth.

IMPORTANT SAFETY INSTRUCTIONS:
If you are unsure about your ceiling/wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this pendant lamp be performed by a licensed electrician.


SIDE VIEW

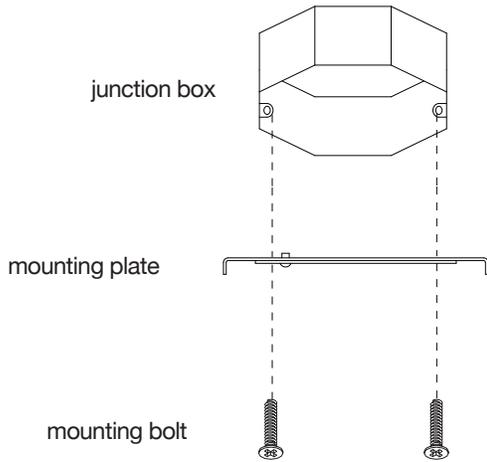

A. Shut off the main electrical supply from the main fuse box/circuit breaker.
 B. Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
 C. Determine final location of pendant. Align holes in **mounting plate** with corresponding holes of ceiling junction box. Secure with 2 **mounting bolts** into mounting plate with a **phillips head screwdriver**. Do not over tighten the bolts.


1

FRONT VIEW

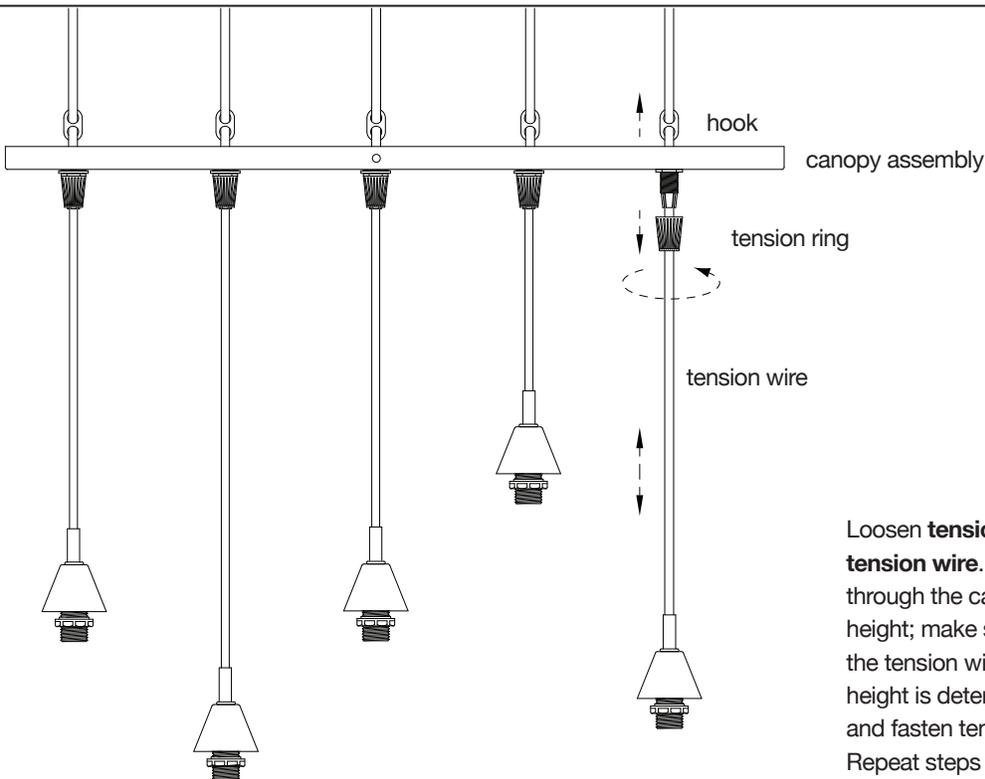

Loosen **tension ring** to adjust height of **tension wire**. Pull the tension wire through the canopy to the desired height; make sure there is no slack on the tension wire. Once the desired height is determined, fix wire with **hook** and fasten tension ring. Repeat steps for each *lamp assembly*.




2

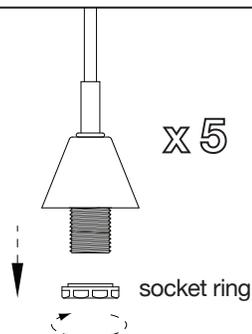

Remove **socket ring** from threaded stem. Set socket ring aside until further instructions.

3

SIDE VIEW

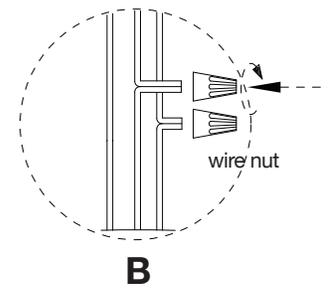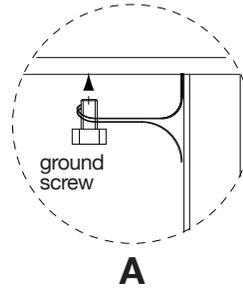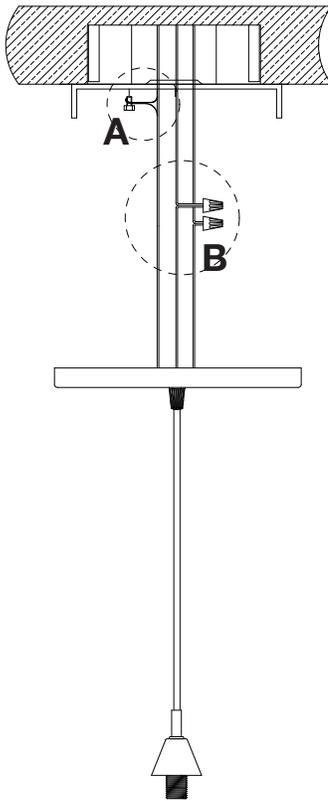

A. Gently pull wiring down from ceiling junction box and allow it to hang.

B. Carefully inspect the pendant's fixture wires:

Neutral fixture wire = white

Hot fixture wire = black

Ground wire = bare copper

C. Wrap *ground wire* of lamp assembly and *ground wire* of junction box together around *ground screw* of mounting plate. Tighten the *ground screw* with a **flat head screwdriver**.


D. Attach the *neutral fixture wire* from the pendant to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.

E. Attach the *hot fixture wire* from the pendant to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

4


SIDE VIEW

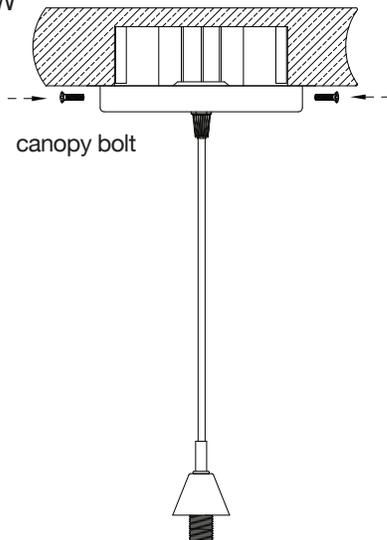

A. Gently tuck the wire connections neatly into the ceiling junction box.

B. With the assistance of another adult, push **canopy assembly** up over the **mounting plate** until it is flush with the ceiling. Align holes in canopy with holes in mounting plate and secure with 2 **canopy bolts**

5

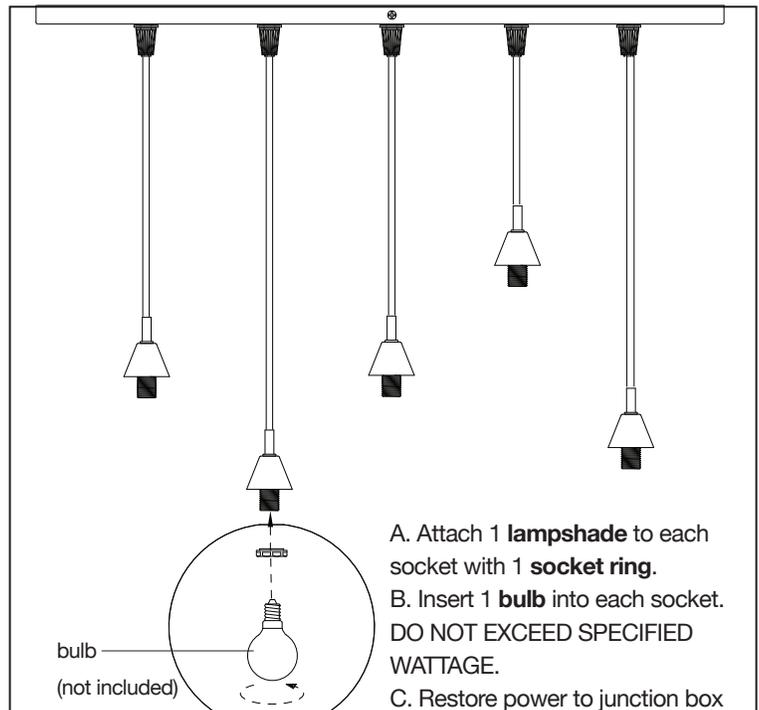

A. Attach 1 **lampshade** to each socket with 1 **socket ring**.

B. Insert 1 **bulb** into each socket. **DO NOT EXCEED SPECIFIED WATTAGE.**

C. Restore power to junction box and test fixture.

Installation is now complete.

6

FRONT VIEW