


Thank you for purchasing the **Junction Low Dresser**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

Note: 2 people are recommended to safely assemble this product.


cleaning and care

Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners.

components



5 - legs

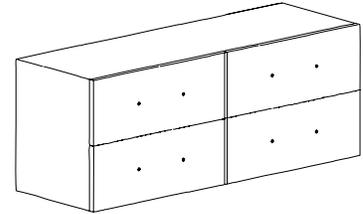

1 - dresser assembly

mounting hardware




4 - small screws



2 - plastic anchors



2 - wall straps




4 - mounting brackets

Missing hardware?


Please call **800.606.6387** for replacements.

tools required




Phillips head screwdriver

(We recommend the use of hand tools instead of power tools)

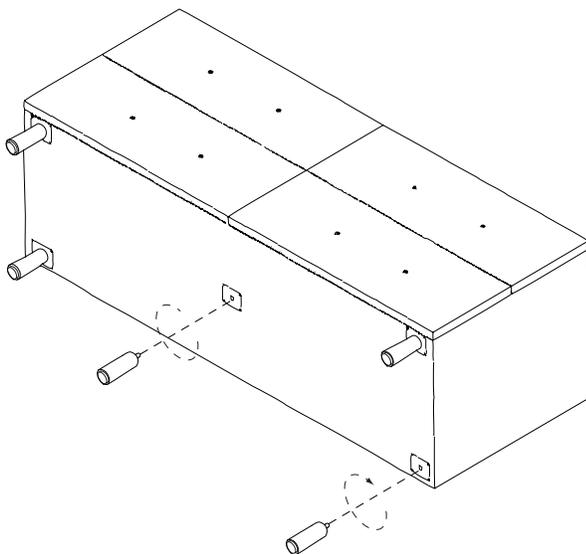



1

With the assistance of another adult, carefully place **dresser assembly** on its back onto a clean, padded surface. Insert 5 **legs** into **dresser assembly**. Turn each leg clockwise to secure.

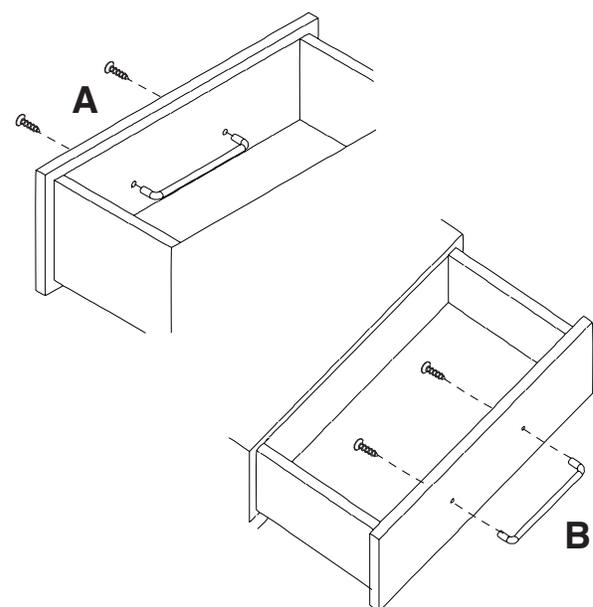

2

A. Using a **Phillips head screwdriver**, remove **pulls** from inside each drawer. Set **screws** aside until further instructions.
 B. Position **pulls** over holes in each drawer front and re-attach with the **screws**.

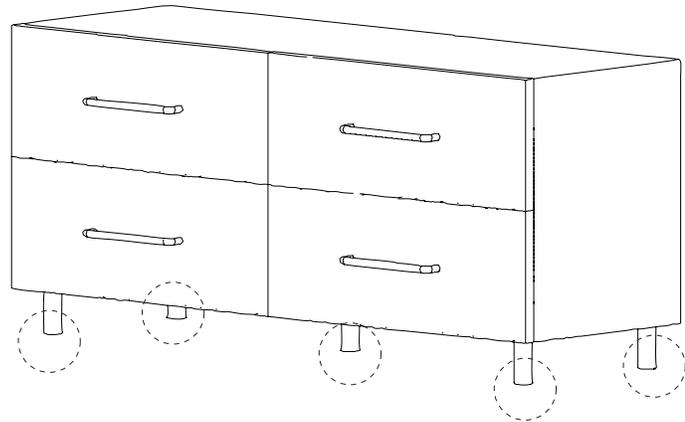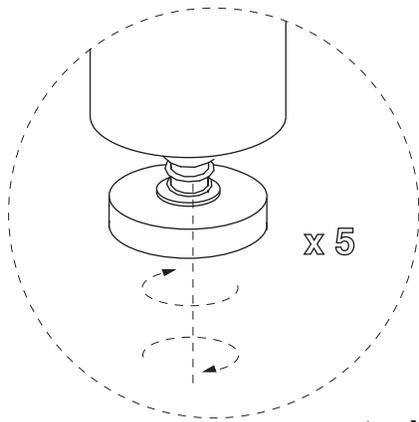


NOTE: To increase stability, adjust each leveler until unit is level.


3 With assistance, position unit upright and adjust *levelers* at bottom of each leg as necessary.

WARNING: Serious or fatal crushing injuries can occur from furniture tip-over. For added safety and stability the wall mounting hardware should be used to anchor this product to the wall. For safe mounting, it is essential to use wall anchors appropriate to your wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible.

NOTE: If you are unsure about your wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

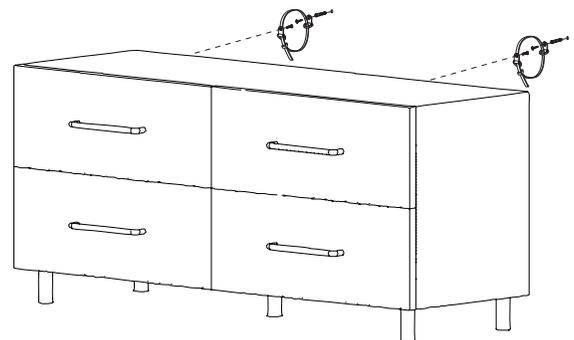

- A. Attach 2 **brackets** to the top of the assembled unit with 1 **small screw** per bracket.
- B. With the assistance of another adult, place the unit in desired location against the wall. Mark the location of the hole in the bracket on the wall. Move the unit out of the workspace.
- C. Drill holes slightly smaller in diameter than the anchors. Insert 1 **plastic anchor** into each hole until they are flush to the wall.
- D. Insert 1 **small screw** through each bracket and plastic anchor. Secure, but do not over tighten with a **phillips head screwdriver**.
- E. Place the unit back into position against the wall and thread the **wall strap** through both brackets and pull until tight.

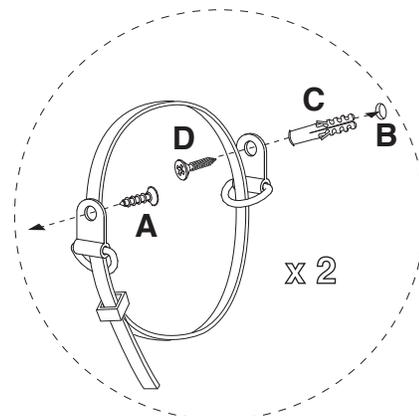

4