

Thank you for purchasing the **Parallel Magazine Wall Rack**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

Note: 2 people are recommended to safely install this product.


### cleaning and care

Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners.


### weight limitations

The maximum load is 65 lbs, evenly distributed.

## hardware



4 - screws



4 - plastic anchors



4 - hex nuts




4 - washers

Missing hardware?

Please call **800.606.6387** for replacements.

## tools required



phillips head screwdriver




power drill  
(for pilot holes only)




hex wrench  
(included)


level



## components

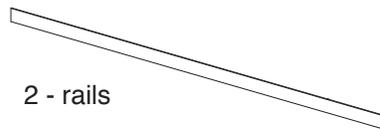

2 - rails



2 - wall brackets

## wall mounting assembly

For safe mounting, it is essential to use wall anchors appropriate to your wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible. These instructions are for drywall mounting only.

**A)** Fit threaded studs of each **rail** into corresponding holes of **wall brackets**. Secure each rail with 2 **hex nuts** and 2 **washers** using a **hex wrench**.

**B)** Determine the location for **magazine wall rack**. Using a **level**, mark hole positions in each **wall bracket** onto the wall. Drill a pilot hole in the wall stud. If the wall stud is not available, drill a hole in the wall that is slightly smaller in diameter than the anchor. Insert 4 **plastic anchors** into holes. Gently tap **plastic anchors** into the wall until the flange of the anchor is flush.

**C)** Using a screwdriver, insert 2 **screws** into **plastic anchors**. Do not fully insert screws, leave 1/4" of each screw exposed from anchors.

**D)** Align each **wall bracket** with corresponding screws in wall. Fit keyholes of **coat rack** into corresponding **screws** in wall. Make sure coat rack is securely supported.

Installation is now complete.

**NOTE:** If you are unsure about your wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

