



This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.


**IMPORTANT SAFETY INSTRUCTIONS:**  
**If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.**

**We recommend installation of this lamp be performed by a licensed electrician.**

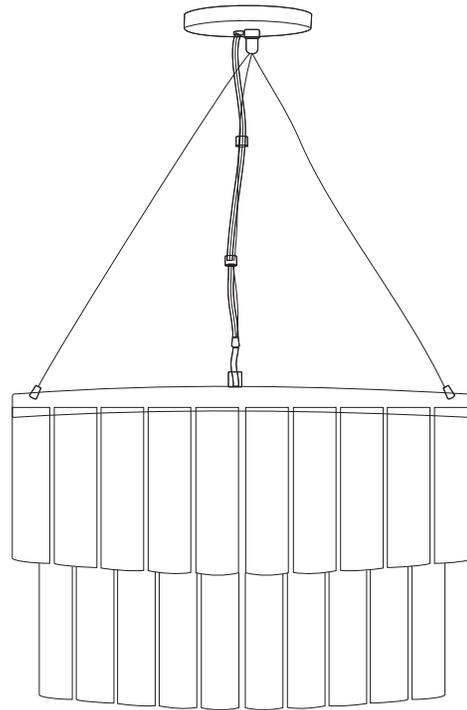

## hardware & components

800.606.6387

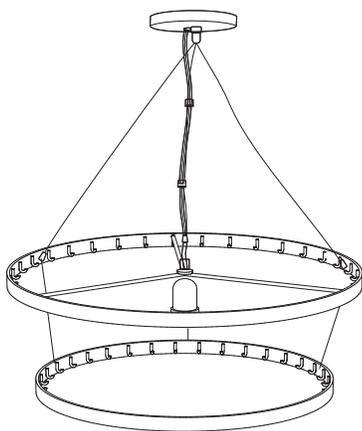

1 - lamp assembly



48 - silver diffusers  
 39 - brass diffusers



1 - mounting plate



2 - canopy bolts



2 - wire nuts



2 - mounting bolts




1 - 23 watt max CFL dimmable bulb (NOT INCLUDED)  
 OR  
 1 - 100 watt max type A standard bulb (NOT INCLUDED)


## tools required




electrical tape



allen wrench (included)




flat head screwdriver



phillips head screwdriver

## cleaning & care

Dust surfaces with a dry soft cloth. Do not use cleaners or polishes on the lamp.

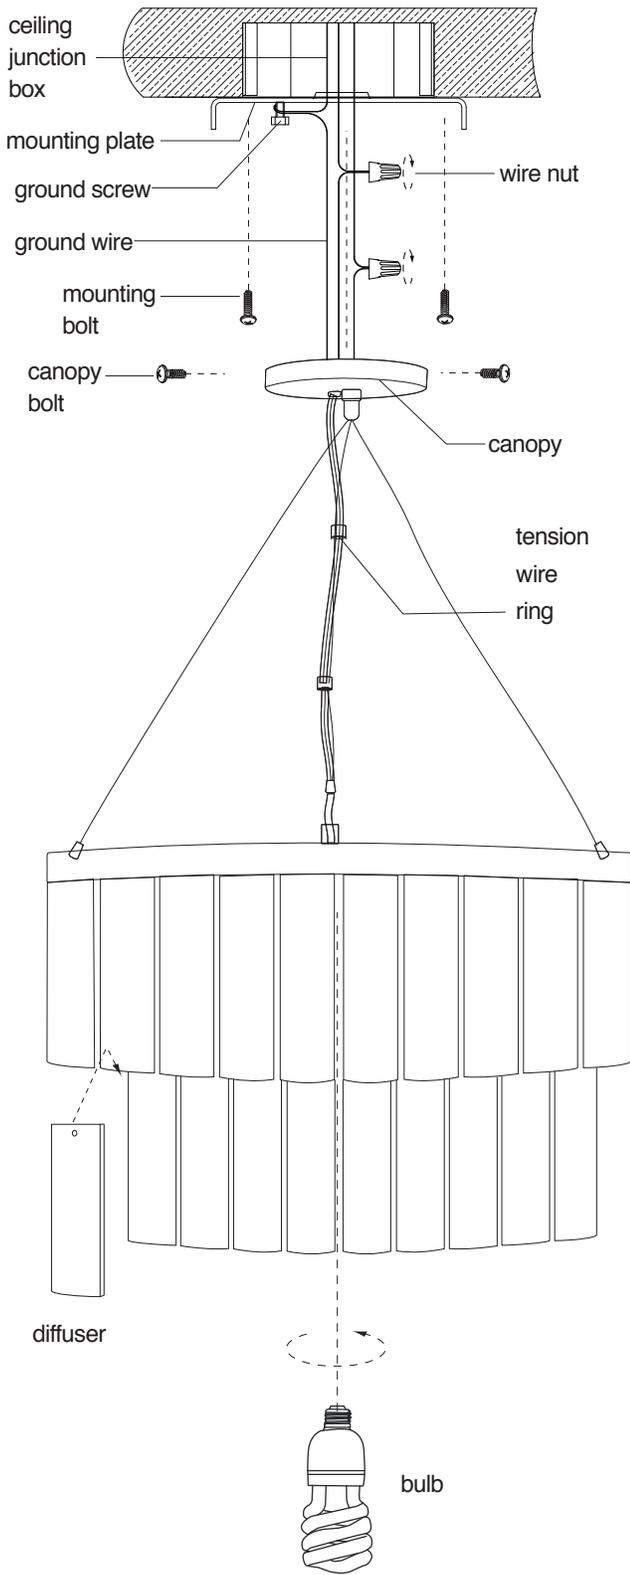

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
  - 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
  - 3) Loosen the small screws on the tension wire rings with the **allen wrench** and pull the cord and tension wire through the canopy to desired height; make sure there is no slack on the tension wire as shown. Evenly space the tension wire rings and tighten the small screws with the **allen wrench** to secure. When attaching canopy to the mounting plate, neatly coil extra tension wire inside the canopy so it is stored under the mounting plate.
  - 4) Place the **mounting plate** over the center of the ceiling junction box.
  - 5) Align holes in **mounting plate** with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
  - 6) Gently pull wiring down from ceiling junction box and allow it to hang.
  - 7) Carefully inspect the lamp fixture's wires:
    - *Neutral fixture wire* = white
    - *Hot fixture wire* = black
    - *Ground wire* = green
  - 8) Attach the *ground wire* of the lamp assembly to the *ground wire* from the junction box and securely wrap around ground screw of the mounting plate. Tighten the ground screw with a **flat head screwdriver**.
  - 9) Attach the *neutral fixture wire* from the lamp to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
  - 10) Attach the *hot fixture wire* from the lamp to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck wire connections neatly into the ceiling junction box. Gently tuck cord and tension wire neatly into canopy assembly.
  - 12) Fit **canopy** onto **mounting plate** and secure with 2 **canopy bolts**.
  - 13) Hook 1 **diffuser** onto each hook on the inside of the lamp shade rings as shown.
  - 13) Insert 1- **bulb (not included)** into socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
  - 14) Restore power to junction box and test fixture. Installation is now complete.