


This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.

### IMPORTANT SAFETY INSTRUCTIONS:

If you are unsure about what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this lamp be performed by a licensed electrician.

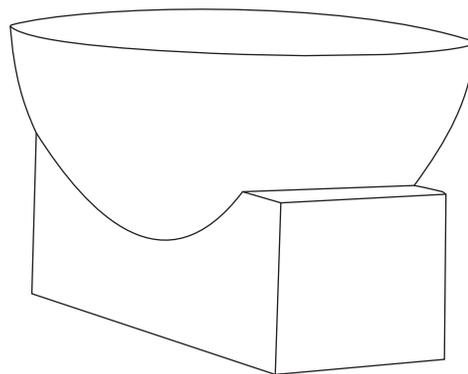

## hardware & components



800.606.6387



2 - bolts




1 - mounting plate  
(pre-attached to lamp fixture)




1 - 13 watt max CFL bulb  
(NOT INCLUDED)  
or  
1 - 60 watt max  
type E26 incandescent bulb  
(NOT INCLUDED)

## tools required




Phillips head screwdriver



flat head screwdriver

## cleaning & care

Dust surfaces with a dry soft cloth. Do not use cleaners or polishes on the lamp.

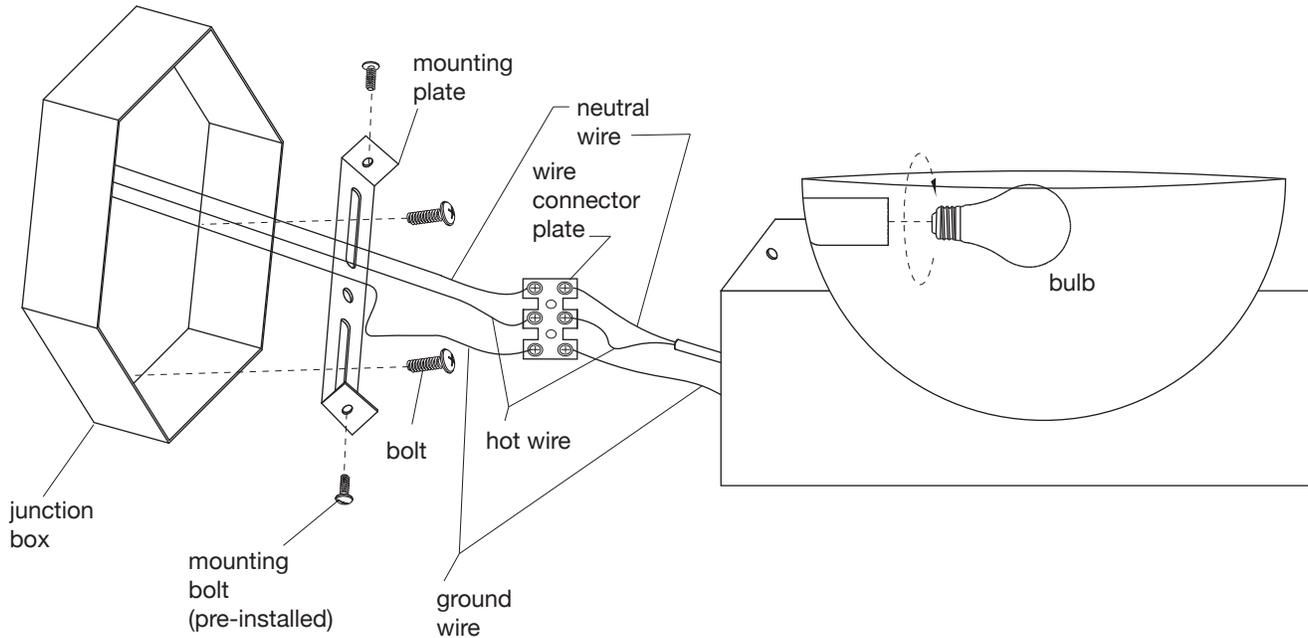

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
  - 2) Carefully unpack all fixture parts and hardware and lay items out on a clear workspace. With a **flat head screwdriver**, unscrew 2 mounting bolts from the canopy of the **lamp assembly** and remove the mounting plate. Set lamp assembly aside until further instructions.
  - 3) Place the **mounting plate** over the junction box, and align holes in mounting plate with corresponding holes in the junction box. Attach mounting plate with 2 **bolts**, and secure with a **phillips head screwdriver**.
  - 4) Gently pull wiring from junction box and allow it to hang. Carefully inspect the fixture wires:
    - Neutral fixture wire = *white*
    - Hot fixture wire = *black*
    - Ground wire = *green*
  - 5) Loosen screws on the wire connector plate. Wrap the *ground* junction box wire around the *ground* screw on the wire connector plate and re-tighten with a **flat head screwdriver**.
  - 6) Wrap the *neutral* junction box wire (usually white) around the *neutral* screw on the wire connector plate and re-tighten.
  - 7) Wrap the *hot* junction box wire (usually black) around the *hot* screw on the wire connector plate and re-tighten. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
  - 8) Gently tuck wires into the junction box. Fit **lamp fixture** into position, aligning holes of fixture with corresponding holes in the mounting plate. Secure with 2 mounting bolts using a **flat head screwdriver**.
  - 9) Insert 1 **bulb** (not included) into the socket of the lamp fixture. **DO NOT EXCEED SPECIFIED WATTAGE.**
- Restore power to junction box and test fixture. Installation is now complete.