


This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.

IMPORTANT SAFETY INSTRUCTIONS:
If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this lamp be performed by a licensed electrician.

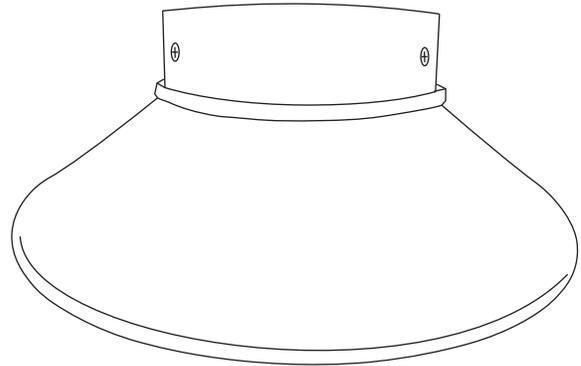

hardware & components

 800.606.6387




1 - mounting plate
(2 mounting plate studs
pre-attached)



2 - mounting bolts



2 - hex nuts




1 - lamp
canopy



3 - wire
nuts



3 - shade
bolts

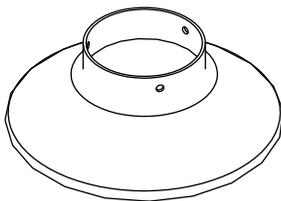

1 - shade




1 - 60 watt max type G
candelabra bulb (NOT
INCLUDED)


tools required




electrical tape



Phillips head screwdriver




flat head screwdriver

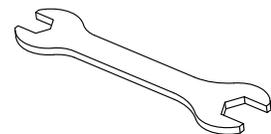

hex wrench

cleaning & care

Dust surfaces with a dry soft cloth.
Do not use cleaners or polishes
on the lamp.

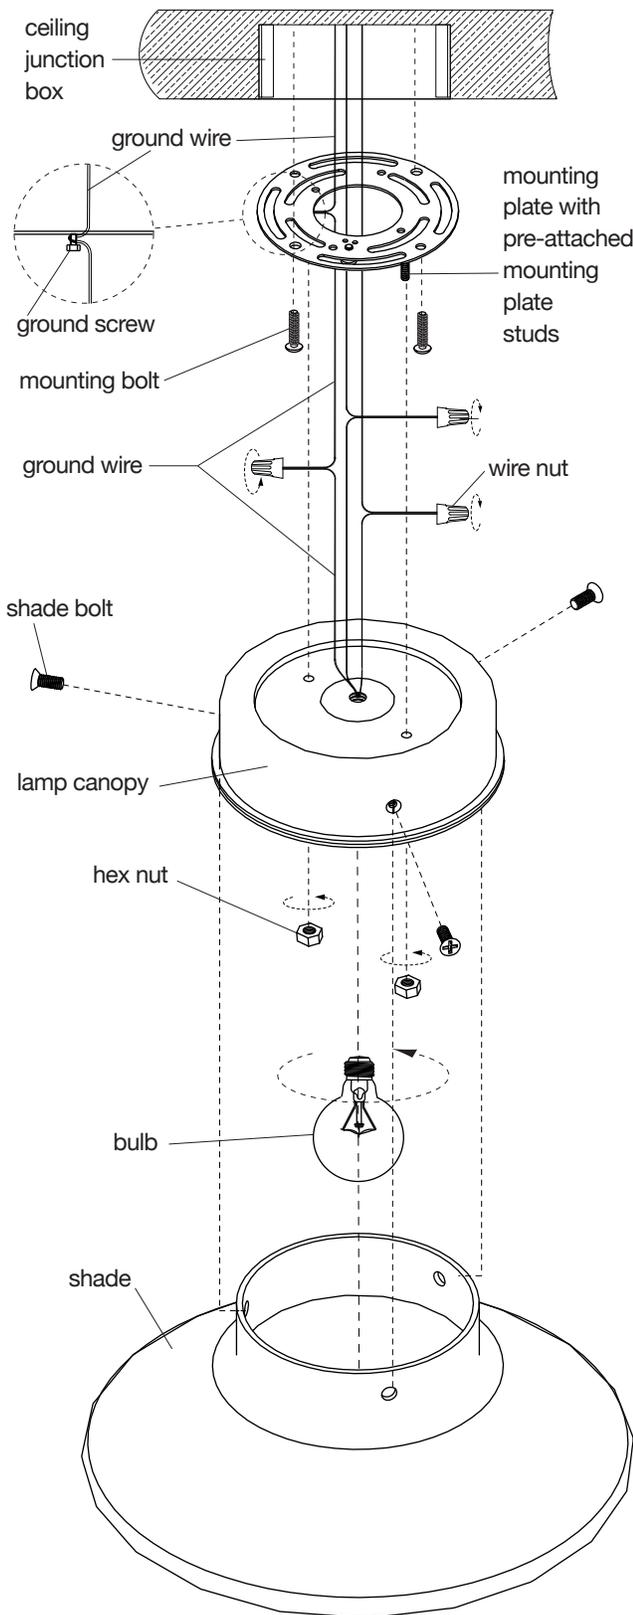

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Gently pull wiring down from ceiling junction box and allow it to hang.
- 4) Place the **mounting plate** over the center of the ceiling junction box. **NOTE:** Make sure the pre-installed mounting studs point down. Align holes in mounting plate with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
- 5) Carefully inspect the wires:
 - *Neutral fixture wire* = white
 - *Hot fixture wire* = black
 - *Ground wire* = bare copper
- 6) Wrap the *ground wire* of the junction box around the *ground screw* on the **mounting plate** and secure with a **flat head screwdriver**. Fasten the open end of the *ground wire* from the junction box to the *ground wire* from the fixture with a **wire nut**, and wrap the connection with **electrical tape**.
- 7) Attach the *neutral fixture wire* to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- 8) Attach the *hot fixture wire* to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 9) Gently tuck wire connections neatly into the ceiling junction box.
- 10) Fit the 2 **mounting plate studs** into the corresponding holes in the **lamp canopy**. Secure studs from inside the lamp canopy with 2 **hex nuts** as shown with a **hex wrench**.
- 11) Insert 1 **bulb** into socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
- 12) Fit **shade** onto lamp canopy, aligning holes in shade with holes in canopy. Secure with 3 **shade bolts**, making sure not over tighten bolts.
- 13) Restore power to junction box and test fixture. Installation is now complete.