


OR

Thank you for purchasing the **Clarabell or Taurus wall hook**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

NOTE: If you are unsure about your wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

hardware




2 - screws




2 - plastic anchors

Missing hardware?
Please call **800.606.6387** for replacements.


tools required



1/4" dia drill




Phillips head
screwdriver




level

components



1 - wall template

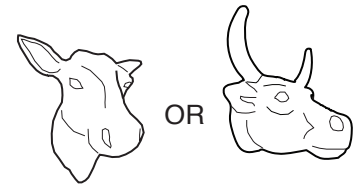

OR

1 - wall hook

wall mounting assembly

For safe mounting, it is essential to use wall anchors appropriate to your wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible. **These instructions are only for drywall mounting only.**

- A) Determine the location for **wall hook**. Using a level, position **wall template** and mark 2 hole positions on the wall.
- B) Drill pilot holes in the wall stud. If the wall stud is not available, drill holes in the wall using a **1/4" diameter drill bit**. Insert 2 **plastic anchors** into holes. Gently tap **plastic anchors** into the wall until the flange of the anchor is flush to the wall.
- C) Insert 1 **screw** into each **plastic anchor** as shown, using a **screwdriver**. Leave approximately 1/4" of the screw head exposed.
- D) Align holes on back of **wall hook** with screws and fit onto screw heads. Make sure hook is securely supported by both screws.

Installation is now complete.

cleaning and care

Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners.

weight limitations

The maximum load is **20lbs**, evenly distributed.

