


Thank you for purchasing the **Fuze Bench**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

Note: 2 people are recommended to safely assemble this product.

## hardware



6 - bolts



6 - rubber washers




6 - nuts




12 - flat washers

Missing hardware? Please call **800.606.6387** for replacements.

## components

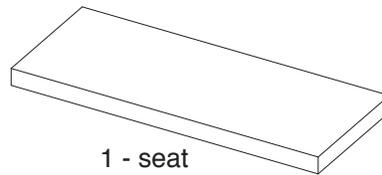

1 - seat




1 - base

## tools required




2 - hex wrenches

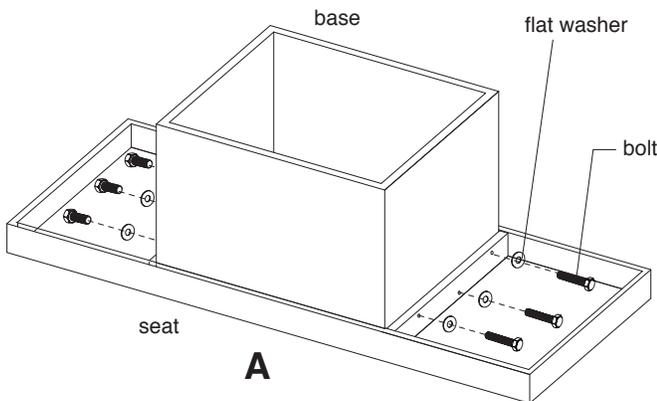

**A**

**1** A. With assistance of another adult, place **seat** upside down onto a clean, padded surface. Thread **1 flat washer** through each **bolt**. Carefully fit **base** into **seat** and attach with **6 bolt/flat washers** as shown. Firmly push on each bolt until the head is flush with the surface.

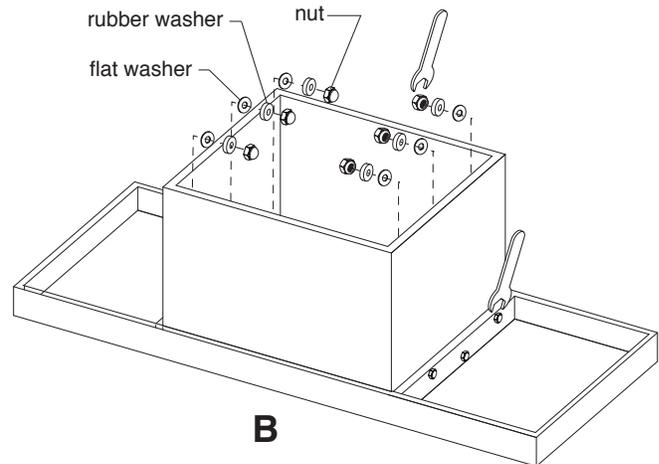

**B**

B. From the inside of the base, secure each **bolt** with **1 flat washer**, **1 rubber washer** and **1 nut** as shown. Turn each **nut** clockwise and secure with the **hex wrench**. With assistance, position unit upright. Assembly is now complete.

## cleaning and care

Treat the surface on a regular basis with a transparent stone floor wax. Cement is sensitive to all kind of spills and extremely porous, so remove spills immediately with a dry cloth. If used outdoors, keep covered when not in use to protect against staining from pollution and rain. Store the bench inside during the winter in a cool, dry place. Be aware that color and natural veining will vary with each piece. Clean surfaces with a dry or damp cloth. Do not use abrasives or cleaners with citric acid. Please protect the surface when using markers. Staining may occur when oils or liquids with artificial coloring come in contact directly with the porous surface. **CAUTION:** Exposure to direct sunlight may alter the color.