

Thank you for purchasing the **Hop Wall Hook**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


## hardware




2 - screws    2 - plastic anchors

Missing hardware?  
Please call **800.606.6387** for replacements.

## tools required




Phillips head screwdriver



power drill  
(for pilot holes only)

## components




1 - wall hook

## wall mounting assembly

For safe mounting, it is essential to use wall anchors appropriate to your wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible. These instructions are for drywall mounting only.

- A)** Determine the final location of unit. Using a level, position **wall hook**. Mark 2 hole positions on the wall.
- B)** Drill a pilot hole in the wall stud. If the wall stud is not available, drill a hole in the wall that is slightly smaller in diameter than the anchor. Insert 2 **plastic anchors** into holes. Gently tap **plastic anchors** until the flange of the anchor is flush with the wall.
- C)** Insert 2 **screws** through **wall hook** and into **plastic anchors** in the wall as shown, using a screwdriver. Installation is now complete.

**NOTE: If you are unsure about your wall type or what mounting method you should use, consult a qualified professional or your local hardware store.**

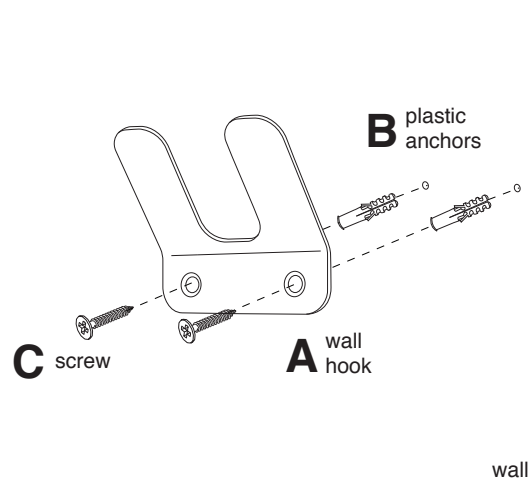

## cleaning & care

Clean surfaces with a dry soft cloth. Do not use abrasive cleaners.

**Note: This item is able to support up to a total of 20 lbs evenly distributed, with max of 10 lbs per hook.**