
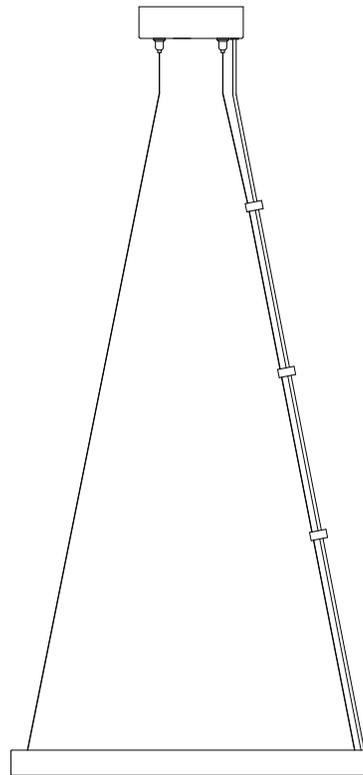


This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.



IMPORTANT SAFETY INSTRUCTIONS:
If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this lamp be performed by a licensed electrician.



hardware & components


800.606.6387

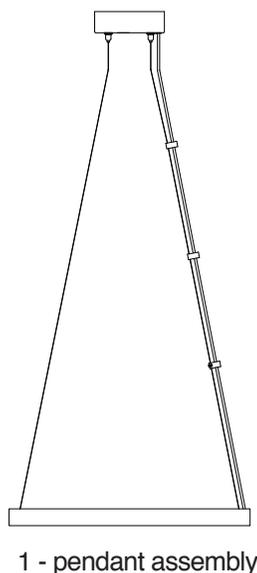

tools required




electrical tape



allen wrench (included)

cleaning & care

Dust surfaces with a dry soft cloth. Do not use cleaners or polishes on the lamp.

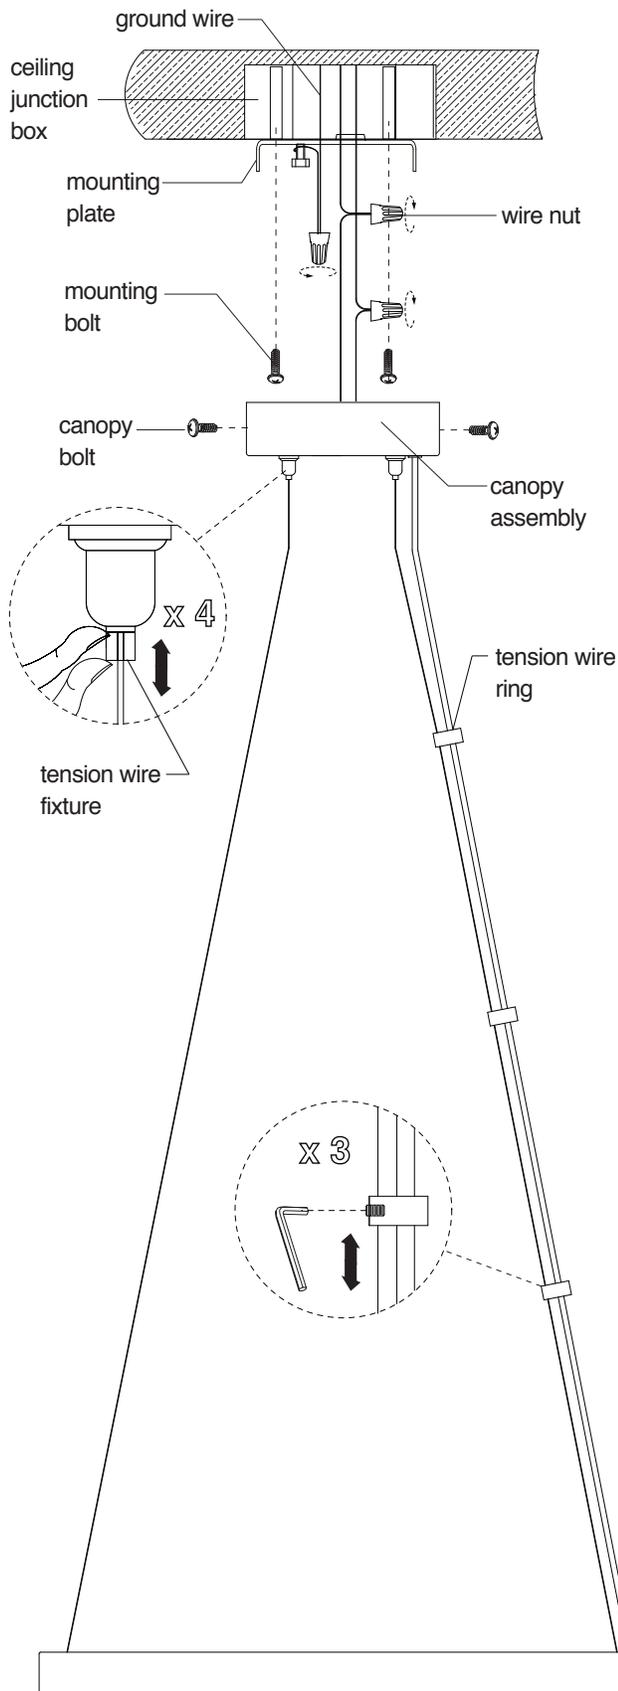

assembly

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
 - 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
 - 3) Pull the tension wire and cord through the canopy to the desired height, making sure there is no slack on the tension wire as shown. The tension wires can be adjusted by depressing the fitting on the tension wire fixture. Evenly space the **tension wire rings** and tighten the set screws with an **allen wrench** to secure into position.
 - 4) Place the **mounting plate** over the center of the ceiling junction box. Align holes in mounting plate with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
 - 5) Gently pull wiring down from ceiling junction box and allow it to hang.
 - 6) Carefully inspect the pendant's fixture wires:
 - *Neutral fixture wire* = **white**
 - *Hot fixture wire* = **black**
 - *Ground fixture wire* = **green**
 - 7) Wrap *ground wire* of junction box around pre-installed *ground wire* from mounting plate. Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
 - 8) Attach the *neutral fixture wire* from the pendant to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
 - 9) Attach the *hot fixture wire* from the pendant to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 10) Gently tuck wire connections neatly into the ceiling junction box. Neatly coil extra tension wire and cord inside the canopy so it is stored under the mounting plate.
 - 11) Fit **canopy** assembly onto **mounting plate** and secure with 2 **canopy bolts**, using a **phillips head screwdriver**.
 - 12) Restore power to junction box and test fixture. Installation is now complete.