


components & hardware


Missing hardware?
Please call **800.606.6387**
for replacements.




1 - socket ring




1 - diffuser

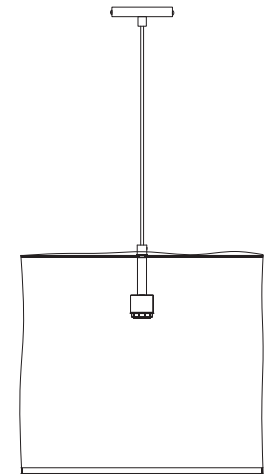

1 - pendant assembly



1 - mounting plate



2 - mounting bolts



2 - wire nuts




2 - canopy bolts



1 - 60 watt max type G40 bulb (NOT INCLUDED)

tools required



phillips head screwdriver



electrical tape


cleaning & care

Gently shake the fabric to remove dust and debris.

IMPORTANT SAFETY INSTRUCTIONS:

If you are unsure about your ceiling/wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this pendant lamp be performed by a licensed electrician.

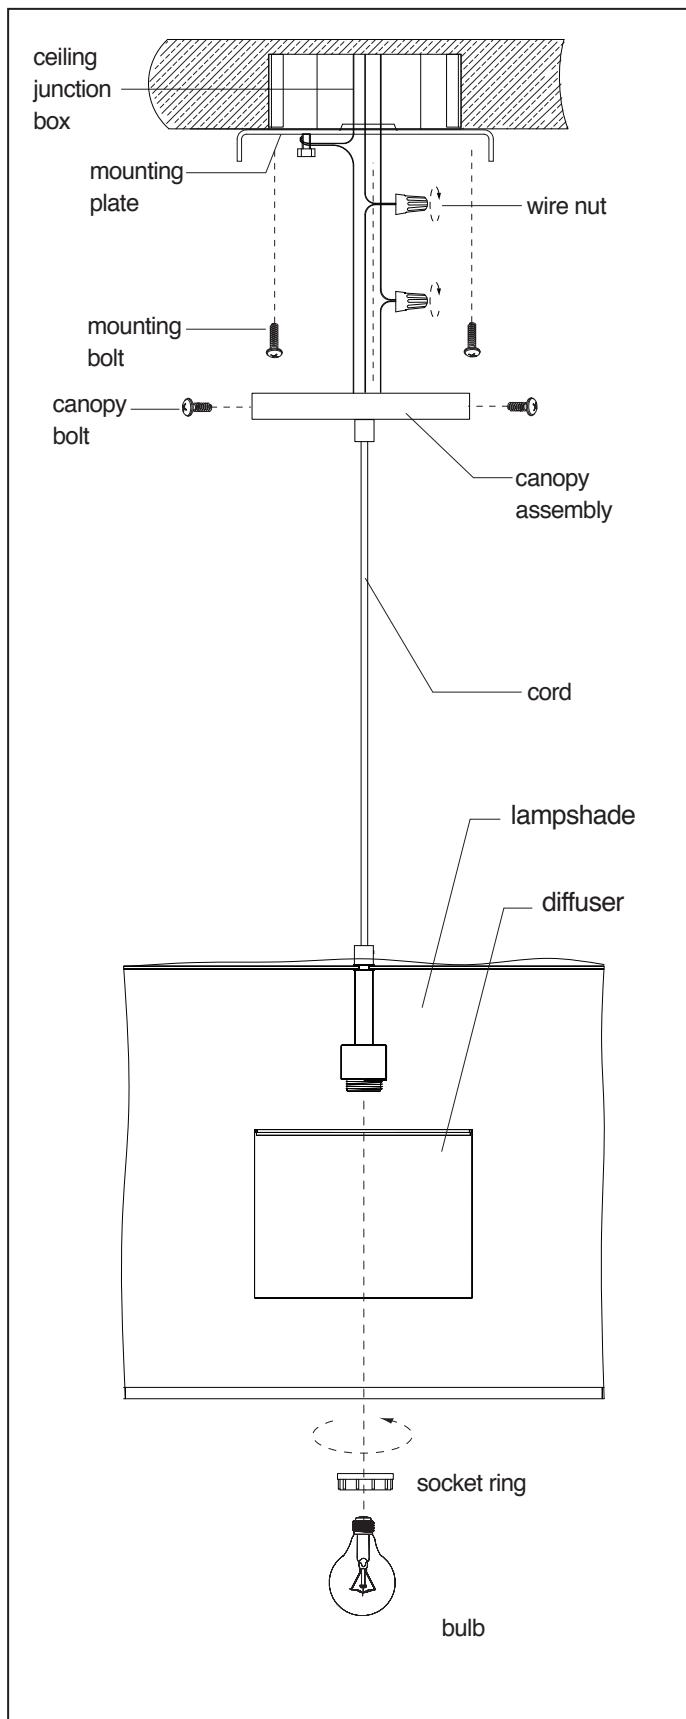

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Place the **mounting plate** over the center of the ceiling junction box.
- 4) Align holes in **mounting plate** with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
- 5) Gently pull wiring down from ceiling junction box and allow it to hang.
- 6) Carefully inspect the pendant's fixture wires:
 - *Neutral fixture wire* = white
 - *Hot fixture wire* = black
 - *Ground wire* = green
- 7) Attach the *ground wire* of the pendant assembly to the *ground wire* from the junction box and securely wrap around ground screw of the mounting plate.
- 8) Attach the *neutral fixture wire* from the pendant to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- 9) Attach the *hot fixture wire* from the pendant to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 10) Gently tuck wire connections neatly into the ceiling junction box. Gently tuck cord and tension wire neatly into canopy assembly.
- 11) Fit **canopy assembly** onto **mounting plate** and secure with 2 **canopy bolts**, using a **phillips head screwdriver**.
- 12) Fit **diffuser** over socket and attach with a **socket ring**. Turn ring clockwise to secure.
- 13) Insert 1- **bulb (not included)** into socket. DO NOT EXCEED SPECIFIED WATTAGE.
- 14) Restore power to junction box and test fixture. Installation is now complete.