



This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.

IMPORTANT SAFETY INSTRUCTIONS:

If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

CAUTION: This lamp fixture is heavy, make sure the junction box and ceiling structure can adequately support the weight.

We recommend installation of this lamp fixture be performed by a licensed electrician.

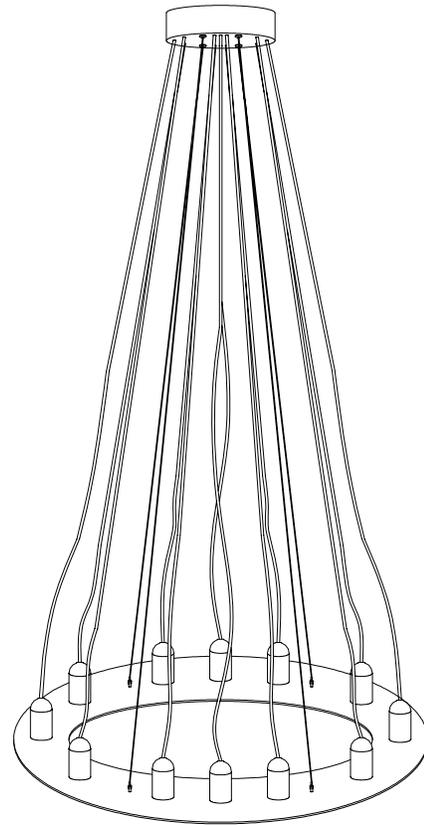

hardware & components



2 - mounting bolts



3 - wire nuts



1 - mounting plate



2 - canopy bolts




12 - 60 watt max type A standard bulbs (NOT INCLUDED)


tools required



electrical tape




Phillips head screwdriver



flat head screwdriver

cleaning & care

Dust surfaces with a dry soft cloth. Do not use cleaners or polishes on the lamp.

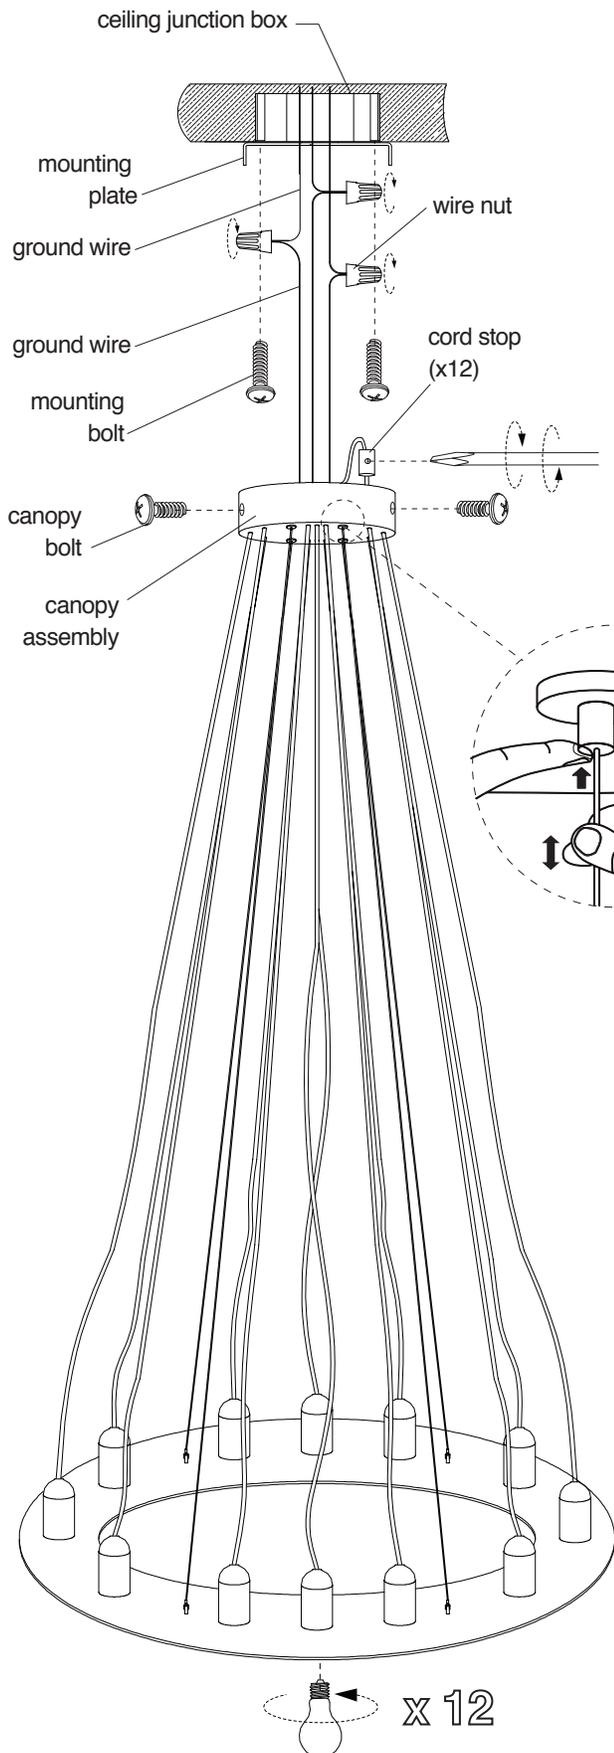

assembly

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
 - 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
 - 3) Loosen the small screw on each **cord stop** (on the inside of the canopy) with a **flat head screwdriver**, and pull the **cords** through the **canopy** to the desired height. Re-tighten each cord stop with the flat head screwdriver.
 - 4) Press down on the flange of each **tension wire support** to adjust tension wires until they are tight and release the tension wire support. **Make sure the weight of the fixture is supported by the tension wires only, there should be slack on the cords.** When attaching canopy to mounting plate, neatly coil extra tension wire inside the canopy so it is stored under the mounting plate.
 - 5) Place the **mounting plate** over the center of the ceiling junction box and attach with 2 **mounting bolts**. Secure bolts with a **phillips head screwdriver**.
 - 6) Gently pull wiring down from ceiling junction box and allow it to hang.
 - 7) Carefully inspect the pendant's fixture wires:
 - *Neutral fixture wire* = **white**
 - *Hot fixture wire* = **black**
 - *Ground wire* = **green**
 - 8) Attach the *ground fixture wire* from the lamp to the *ground junction box wire* (usually green). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
 - 9) Attach the *neutral fixture wire* from the lamp to the *neutral junction box wire* (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
 - 10) Attach the *hot fixture wire* from the lamp to the *hot junction box wire* (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck the wire connections neatly into the ceiling junction box.
 - 12) Push **canopy assembly** up over the **mounting plate** until it is flush with the ceiling. Align holes in canopy with holes in mounting plate and secure with 2 **canopy bolts**.
 - 13) Insert 12 bulbs (not included) into each socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
 - 14) Restore power to junction box and test fixture. Installation is now complete.