


Thank you for purchasing the **Sawyer Chair**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.
 Note: 2 people are required to safely assemble this product.

hardware




14 - small bolts



4 - large bolts


Missing hardware?
 Please call **800.606.6387** for replacements.

tools required




allen wrench (included)


components

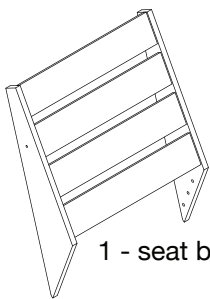


1 - seat back

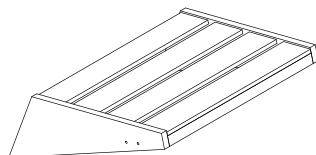


1 - seat base



2 - legs




2 - arm rests
 (1 left, 1 right)



1 - crossbar

NOTE: Do not over tighten the bolts

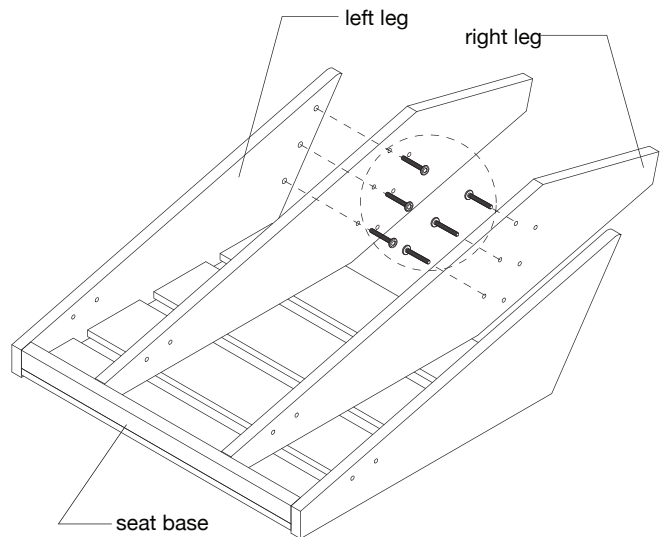

Place **seat base** onto a clean, padded surface as shown. Attach each **leg** to **seat base** with 3 **small bolts** as shown. Secure, but do not over tighten, bolts using an **allen wrench**.

1

Diagram 2 shows the seat back being positioned over the leg assembly. Six small bolts are shown being inserted into the seat back to secure it to the leg assembly.

2 Position *seat base/leg assembly* as shown. Fit **seat back** over leg assembly and attach with **6 small bolts** as shown.

Diagram 3 shows the right armrest being attached to the seat back and leg. Part A shows the right arm rest being attached to the seat back with one small bolt. Part B shows the right arm rest being attached to the leg with two large bolts. Part C shows the crossbar being inserted into the right armrest.

3

A. Attach **right arm rest** to *seat back* with **1 small bolt** as shown.
 B. Attach **right arm rest** to *leg* with **2 large bolts** as shown.
 C. Fit dowels of **crossbar** into **right armrest** as shown.

Diagram 4 shows the left armrest being attached to the seat back and leg. Part A shows the crossbar being inserted into the left armrest. Part B shows the left armrest being attached to the seat back with one small bolt. Part C shows the left armrest being attached to the leg unit with two large bolts.

4

A. Fit dowels of **crossbar** into **left armrest** as shown.
 B. Attach **left armrest** to *seat back* with **1 small bolt** as shown.
 C. Attach **left armrest** to *leg unit* with **2 large bolts** as shown.
 Assembly is now complete.

cleaning & care

-During normal weathering, wood may crack slightly due to changes in moisture. This does not affect the structural integrity of your furniture.

-Clean surfaces with a dry or damp soft cloth.

-Do not use abrasive cleaners. We recommend the use of outdoor furniture cleaner that can be purchased at Crate and Barrel. This cleaner should be used before teak oil application.

-As wood is a natural material, its appearance may change if left outside and untreated. A teak oil surface coating is vital in protecting it from premature lightening, or splitting, when exposed to weather. We recommend the finish be regularly maintained to ensure that the wood is protected from moisture and the furniture continues to look its best.

-In order to maintain the appearance of the wood, regular coatings of teak oil should be applied every two months. The frequency will depend on the weather conditions experienced.

-To prolong the life of this wooden furniture, it should be protected from severe weather and stored under cover during winter. A liberal coating of teak oil should be given to the furniture before it is stored, and again when it is removed from storage.

-Should you choose not to treat your furniture, then it will fade and turn a lighter color and develop cracks. Light sanding can refresh the color. After sanding, teak oil can be regularly applied in accordance with the instructions above.

-Store in a cool, dry place after ensuring it is clean and dry.