


Thank you for purchasing the **Trifecta Pendant**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Note: 2 people are required to safely install this product.

components & hardware

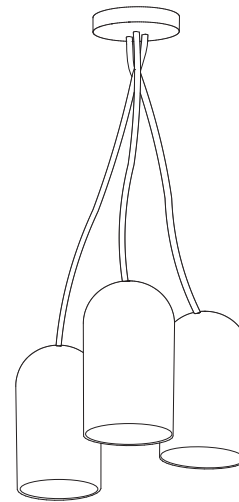

1 - pendant assembly

Missing hardware?
Please call **800.606.6387**
for replacements.



2 - mounting bolts



1 - mounting plate




2 - canopy bolts



3 - 13 watt max CFL bulbs (NOT INCLUDED)
OR 3- 60 watt max type A standard bulbs (NOT INCLUDED)

tools required



phillips head screwdriver


cleaning & care

Dust surfaces with a dry soft cloth.

IMPORTANT SAFETY INSTRUCTIONS:

If you are unsure about your ceiling/wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this pendant lamp be performed by a licensed electrician.

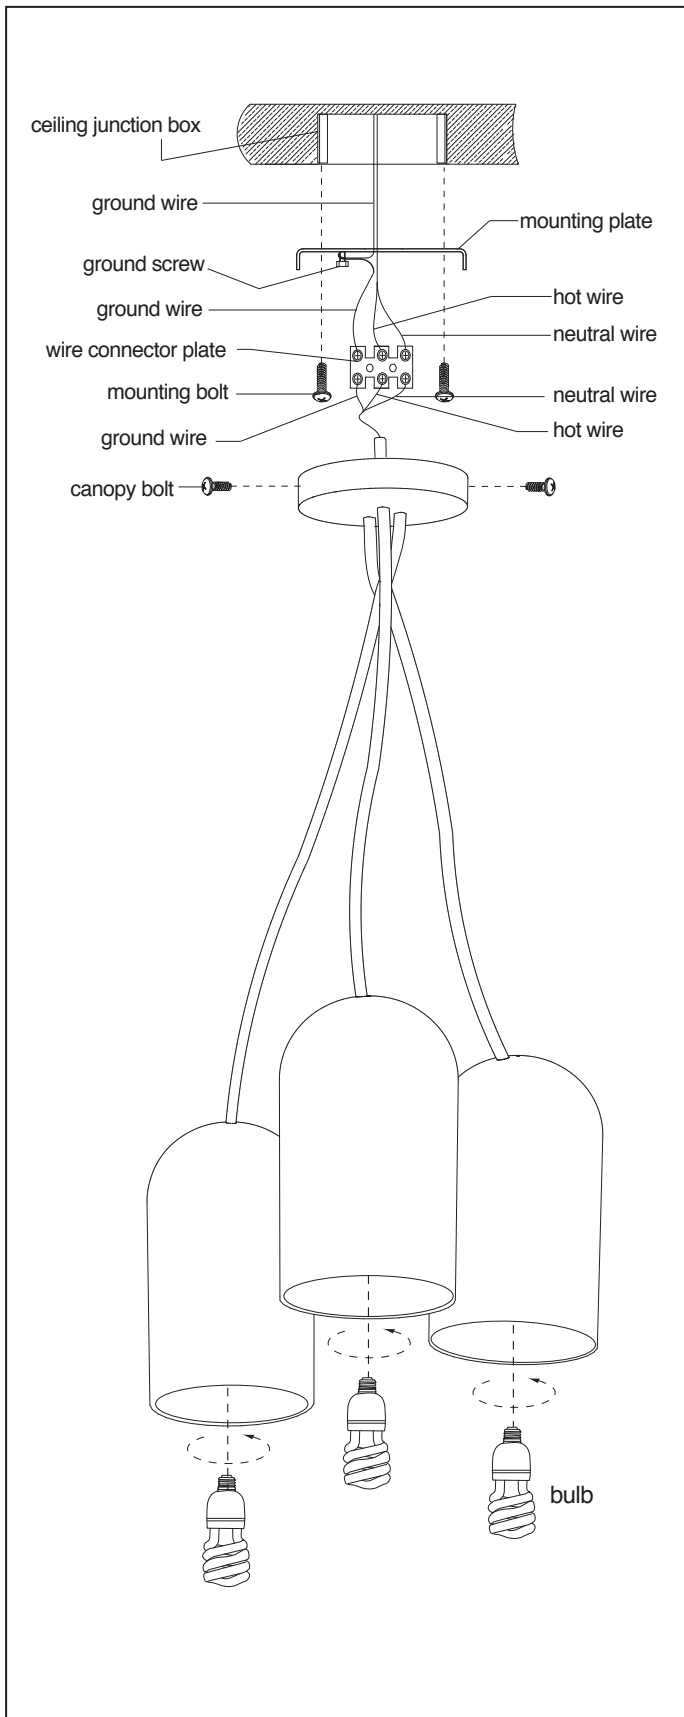

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Pull the **cords** through the **canopy assembly**. Adjust the individual cords to desired heights by loosening the *nuts* on the inside of the canopy and pulling cords into position. Re-tighten *nuts* and position each *plastic cord stop* flush against the nut.
- 4) Place the **mounting plate** over the center of the ceiling junction box.
- 5) Align holes in **mounting plate** with holes in junction box and attach with 2 **mounting bolts**, using a **phillips head screwdriver**.
- 6) Gently pull wiring down from ceiling junction box and allow it to hang.
- 7) Carefully inspect the pendant's fixture wires:
 - *Neutral fixture wire* = white
 - *Hot fixture wire* = black
 - *Ground wire* = green
- 8) Loosen ground screw on mounting plate. Wrap *ground wire* from junction box and ground wire from the wire connector plate/fixture around screw. Re-tighten the ground screw.
- 9) Loosen the screws on the **wire connector plate**. Wrap the *neutral junction box wire* (usually white) around the screw on the wire connector plate and re-tighten.
- 10) Wrap the *hot junction box wire* (usually black) around the screw on the wire connector plate and re-tighten. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11) Gently tuck wire connections neatly into the ceiling junction box.
- 12) Fit **canopy assembly** onto **mounting plate** and secure with 2 **canopy bolts**, using a **phillips head screwdriver**.
- 13) Insert 3- **bulbs (not included)** into socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
- 14) Restore power to junction box and test fixture.

Installation is now complete.