


Thank you for purchasing the **Yellow Dot Wall Hook**. This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.
 Note: 2 people are recommended to safely install this product.

hardware




2 - screws



2 - plastic anchors


Missing hardware?
 Please call **800.606.6387** for replacements.

components

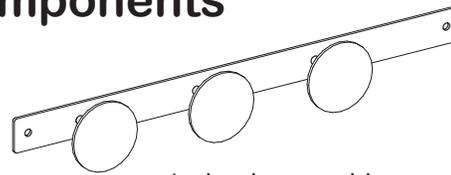


1 - hook assembly

tools required



level (not included)




phillips head screwdriver

(We recommend the use of hand tools instead of power tools)

wall mounting assembly

NOTE: If you are unsure about your wall type or what mounting method you should use, consult a qualified professional or your local hardware store.

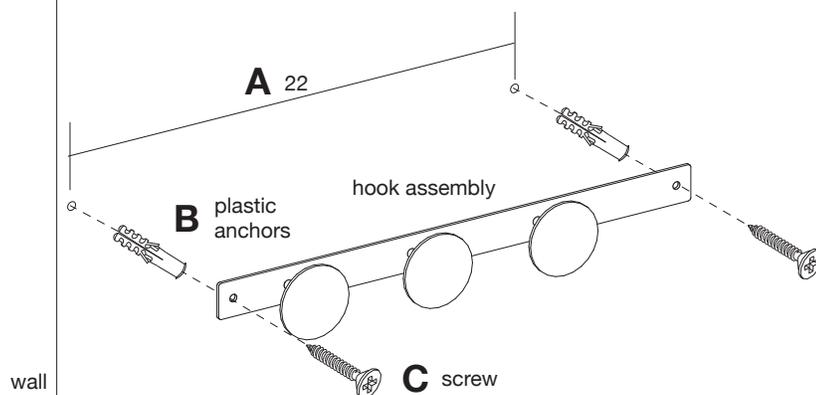

NOTE: Do not over tighten the screws

For safe mounting, it is essential to use wall anchors appropriate to your wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible.

- A)** Determine the final location of unit. Using a level, position unit until it is level. Mark 2 hole positions on the wall, approximately 22" apart.
- B)** Drill a pilot hole in the wall stud. If the wall stud is not available, drill a hole in the wall that is slightly smaller in diameter than the anchor. Insert 2 **plastic anchors** into holes. Gently tap **plastic anchors** until the flange of the anchor is flush with the wall.
- C)** Insert 2 **screws** through the **hook assembly** and into the **plastic anchors** in the wall as shown. Secure, but do not over tighten, screws using a screwdriver.

Installation is now complete.

cleaning & care

Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners.