



# smoke glass PENDANT




This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.

**IMPORTANT SAFETY INSTRUCTIONS:**  
If you are unsure about your ceiling type or what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this pendant lamp be performed by a licensed electrician.

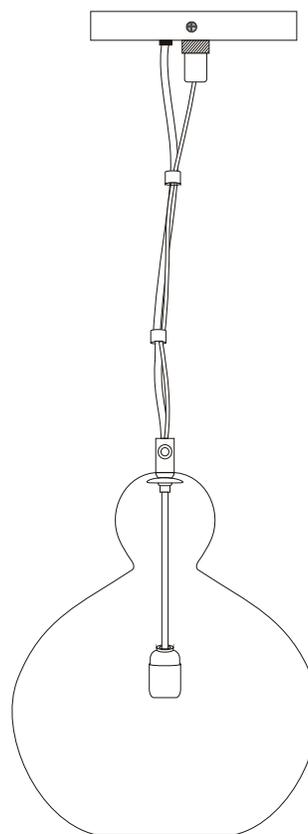

## hardware & components




2 - mounting bolts




2 - wire nuts



2 - canopy bolts



1 - mounting plate

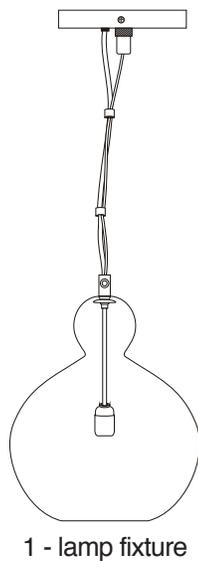

1 - lamp fixture



1 - 23 watt max CFL bulb (NOT INCLUDED)  
**OR**  
1 - 100 watt max type A standard bulb (NOT INCLUDED)


## tools required



electrical tape



allen wrench (included)




phillips head screwdriver

## cleaning & care

Dust surfaces with a dry soft cloth. Do not use polishes or cleaners on the lamp.

# smoke glass PENDANT

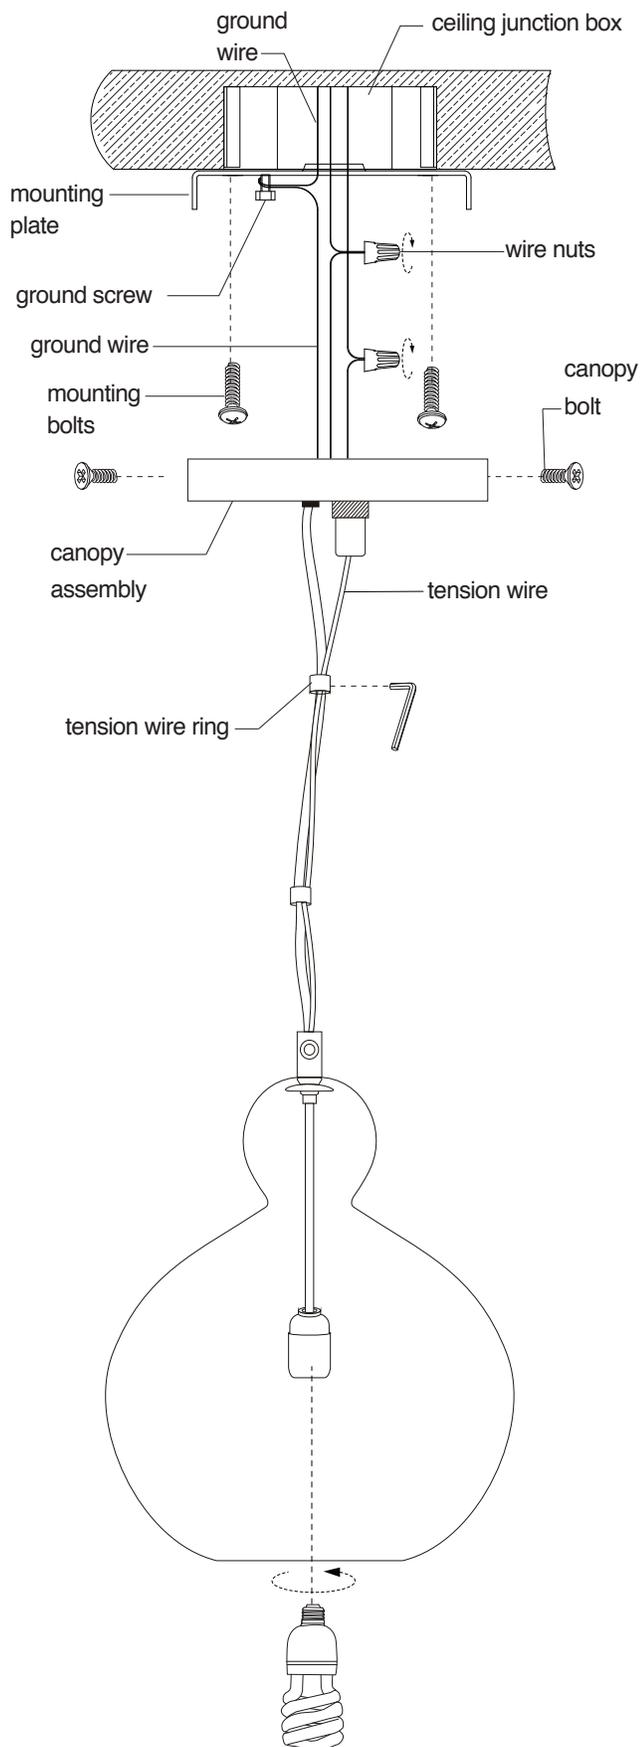

## assembly

- 1) Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2) Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
- 3) Loosen the small screw on the **tension wire rings** with the **allen wrench**, and pull the **cord and tension wire** through the **canopy** to the desired height. Make sure there is no slack on the tension wire. Evenly space the tension wire rings and re-tighten the small screws with the allen wrench.
- 4) Place the **mounting plate** over the center of the ceiling junction box.
- 5) Align holes in **mounting plate** with holes in junction box and attach with 2 **mounting bolts**. Secure bolts with a **phillips head screwdriver**.
- 6) Gently pull wiring down from ceiling junction box and allow it to hang.
- 7) Carefully inspect the pendant's fixture wires:
  - **Neutral fixture wire = white**
  - **Hot fixture wire = black**
  - **Ground wire = green**
- 8) Wrap **ground wire** of lamp assembly and **ground wire** of junction box together around **ground screw** of mounting plate. Tighten the **ground screw** with a **phillips head screwdriver**.
- 9) Attach the **neutral fixture wire** from the pendant to the **neutral junction box wire** (usually white). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- 10) Attach the **hot fixture wire** from the pendant to the **hot junction box wire** (usually black). Fasten each together with a **wire nut** and wrap the connection with **electrical tape**.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 11) Gently tuck the wire connections and extra tension wire neatly into the ceiling junction box.
- 12) Push **canopy assembly** up over the **mounting plate** until it is flush with the ceiling. Align holes in canopy with holes in mounting plate and secure with 2 **canopy bolts**.
- 13) Insert 1 **bulb** (not included) into the socket. **DO NOT EXCEED SPECIFIED WATTAGE**.
- 14) Restore power to junction box and test fixture.

Installation is now complete.